

Utility Pole Rock Drills



Dependable, Durable, Fast Utility Pole Rock Drills

- Hole sizes 11 7/8" to 36" (302 - 914 mm)
- Customizable designs to accommodate various applications and conditions
- Delivers outstanding results in overburden and solid rock formations
- Flexible set-ups for use with excavators, utility truck mounts, or rail car mounts
- Hex connection for quick changeover to different hole diameters
- Full line of side inlet air swivels, hex connectors, adaptors, shock subs, shrouds, and lubricators
- Easy DTH hammer maintenance due to only 8 major hammer parts
- Unparalleled expertise and support before, during, and after projects


HAMMERS AND BITS

The World's **Leading**
Drilling Technology




Utility Pole Rock Drill Specifications

Hammer	Bit Shank	Hole Diameter Range	Hammer Weight	Bit Weight Range	Air Consumption
Patriot 120	P120	11 7/8" to 17 1/2" 302 to 445 mm	1067 lbs 485 kg	384 to 571 lbs 174 to 259 kg	1065 to 1900 cfm 503 to 897 l/sec
Patriot 125	P125	12 1/4" to 20" 311 to 508 mm	1155 lbs 525 kg	433 to 831 lbs 196 to 377 kg	1300 to 2300 cfm 614 to 1085 l/sec
Patriot 180	P180	18" to 30" 457 to 762 mm	2452 lbs 1115 kg	1029 to 2275 lbs 467 to 1032 kg	1600 to 2400 cfm 755 to 1133 l/sec
Patriot 240	P240	24" to 36" 610 to 914 mm	5156 lbs 2344 kg	2174 to 3500 lbs 986 to 1588 kg	2400 to 3950 cfm 1133 to 1864 l/sec

Components

Other Sizes Available

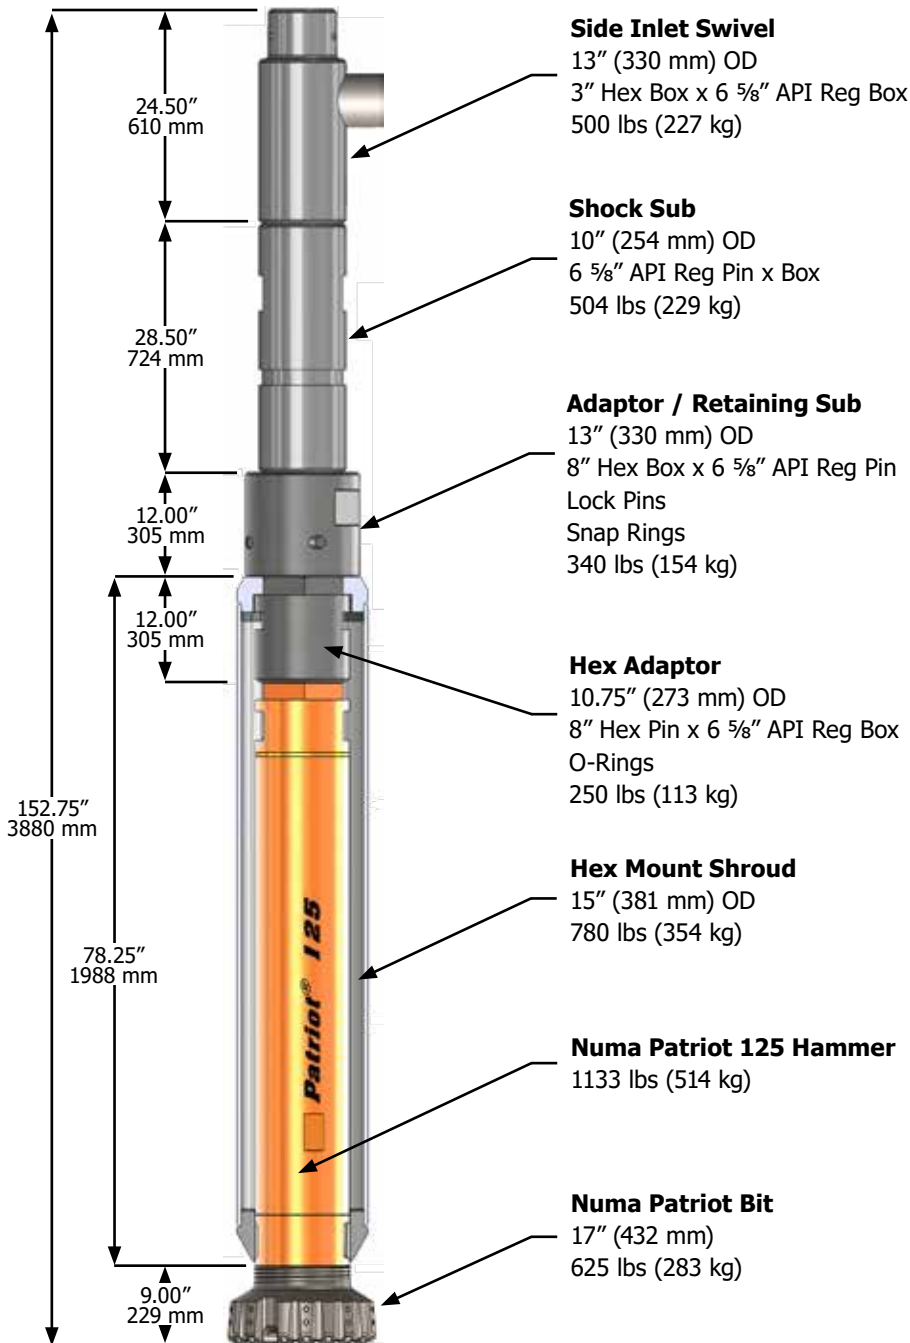

Lubricators



15 Gallon Lubricator



45 Gallon Lubricator

