


FEATURES

- Outdistances competitive hammers in both speed and longevity
- Simplified hammer design with less internal components
- Drills at high frequency to provide less vibration and smooth operation
- More efficient design requires less air which equals fuel savings
- Designed to operate at pressures up to 250 PSI (17.0 BAR)
- Ability to drill efficiently against high heads of water

AIR CONSUMPTION

DRILL PRESSURE (BAR)

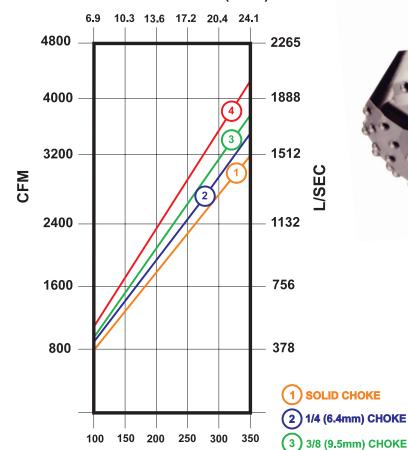

DRILL PRESSURE (PSI)

SPECIFICATIONS

| Diameter | 10-3/4" | 273 mm |
|-------------------------------|-----------|--------|
| Bore | 9-1/4" | 235 mm |
| Stroke | 5" | 127 mm |
| Weight (Hammer only) | 1133 lbs. | 514 kg |
| Length (Shoulder to Shoulder) | 66-3/4" | 170 cm |
| Length (Shoulder to Bit Face) | 75-3/4" | 192 cm |
| A.P.I. Reg. Threads | 6-5/8 | |
| | | |

- 1150 blows per minute at 250 PSI (17.0 BAR)
- Drills holes from 12-1/4" to 20" (312 mm 508 mm) in diameter
- (4) 1/2 (12.7mm) CHOKE Accepts P125 bit shank



Down Hole Button Bits

Patriot® 125



P125 Bit Shank

DIAMETER


inches (millimeters)

| 12-1/4" | (312 mm) |
|---------|----------|
| 12-3/8" | (315 mm) |
| 13" | (331 mm) |
| 14" | (356 mm) |
| 15" | (381 mm) |
| 16" | (406 mm) |
| 17-1/2" | (445 mm) |
| 18" | (457 mm) |
| 19" | (483 mm) |
| 20" | (508 mm) |
| | |

WEIGHT*

pounds (kilograms)

| pourido (itilog | rairio) |
|-----------------|----------|
| 433 lbs. | (197 kg) |
| 437 lbs. | (199 kg) |
| 450 lbs. | (205 kg) |
| 509 lbs. | (231 kg) |
| 533 lbs. | (242 kg) |
| 581 lbs. | (264 kg) |
| 619 lbs. | (281 kg) |
| 646 lbs. | (293 kg) |
| 781 lbs. | (354 kg) |
| 833 lbs. | (378 kg) |
| | |



FACES AVAILABLE



Concave

FEATURES

- Concave face design for advanced hole cleaning capabilities
- 3/4" (19 mm) diameter carbide buttons throughout face
- Several grades and types of carbide are available
- Significantly larger spline area for exceptional strength and transfer of torque
- Plate drive system for increased spline life
- Side wear buttons are available as an option
- Other bit sizes may be available upon request

For More Information Contact:

646 Thompson Road • Thompson, CT 06277 USA
Phone: (860) 923-9551 • Fax: (860) 923-2617
numa@numahammers.com • www.numahammers.com

